

GRAFTech International


HotPressed™ Refractory Systems

EZRAM™ RP10 RAMMING PASTE

Description: EZRAM™ RP10 ramming paste is a highly thermal conductive graphitic ram, primarily used in sub-hearth, cooling pipe, and annulus between steel work and refractories. Ram must be at room temperature (20°C/70°F) before use.

EZRAM™ RP10 ramming paste is available in bulk (loose) form or as pre-rammed briquettes. The pre-rammed briquettes are easily cut to shape and can be molded to fit when installed at room temperature. The bulk (loose) form is used in the same manner as other ramming materials. One advantage of the loose form is that it can be molded on site to form unique shapes as the application requires.

ESSENTIAL PROPERTIES	Typical Average	Min./Max. Individual Sample	Comparable ASTM Test Procedure
Bulk Density (Loose) (gm/cc)	0.78	0.60	ASTM C559
INFORMATIONAL PROPERTIES			
Bulk Density (Rammed) (gm/cc) (Depends on Ramming technique)	1.66		ASTM C559
Thermal Conductivity (W/m ² K)			ASTM C714

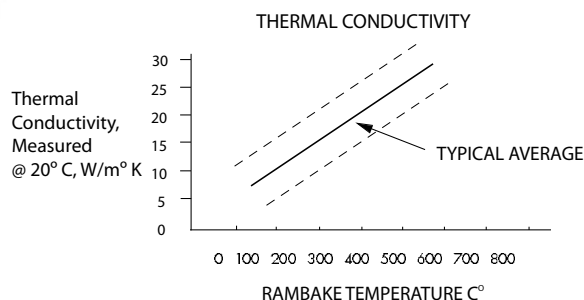

NOTE: Thermal conductivity graph based on sample rammed to 1.7 g/cc density. For lower rammed density the thermal conductivity would be proportionately lower.

GRAFTech International

GrafTech International Holdings Inc.
791 Santa Fe Pike
Columbia, Tennessee, USA 38401
Phone: 1.800.934.8227 (U.S. and Canada Only)
1.931.380.4348
Fax: 1.931.380.4308
email: refractory.systems@graftech.com
Visit us on the World Wide Web at www.graftech.com

TECHNICAL INFORMATION
RPD-08 JANUARY, 2008

This information is based on data believed to be reliable but GrafTech makes no warranties, express or implied, as to its accuracy and assumes no liability arising out of its use. The data listed falls within the normal range of product properties but should not be used to establish specification limits or used alone as the basis of design. GrafTech's liability to purchasers is expressly limited to the terms and conditions of sale. NMA, HotPressed, NMD, NML, NMP, NMH, CJR, CS, CSX, CBY, GradeD, UCB, RP3, RP4, EZRam, SmartRam, CP9, C34, C38, C46, and GR37 are all trademarks of GrafTech International Holdings Inc. ©2008 GrafTech International Holdings Inc.