

Grade LT1™ Thermocouple Protection Tube Specifications & Prices

Description


LT1™ MetalCeramic Thermocouple Protection tube is a hard, abrasion-resistant, chromium and aluminum oxide composite. It has superior oxidation resistance to 2500 °F (1370 °C), thermal conductivity comparable to stainless steel, and good resistance to wetting by most liquid metals.

Standard Tube Dimensions and Tolerances

Dim	English		Metric		Notes
OD	7/8"	±1/16"	22.2 mm	±1.6 mm	
ID	5/8"	+1/16" -3/32"	15.9 mm	+1.6 mm -2.4 mm	ID will pass a 33/64" Ø x 2" long (13.1 Ø x 50.8 long) probe through the full length of the tube
Length	A	±1/16"	A	±1.6 mm	
Straightness: Straight within 3/16" per foot of length, measured chord to arc					

Connector Type A

EMT connector, gland compression, zinc plated steel body with zinc plated malleable iron nut, cemented to tube.

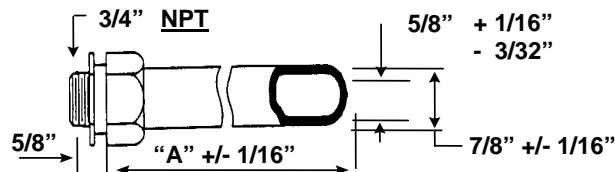

Prices

Catalog Number	Nominal Length "A"		Weight		Price (USD)	
					Connector	
	Inches	mm	lbs	kg	None	Type A
LT19	9"	229	0.6	0.3	119.95	121.50
LT112	12"	305	0.8	0.4	139.15	140.70
LT118	18"	457	1.2	0.5	206.40	207.95
LT124	24"	610	1.8	0.8	276.85	278.40
LT130	30"	762	2	0.9	369.10	370.65
LT136	36"	914	2.6	1.2	433.90	435.45
LT148	48"	1219	3.5	1.6	864.95	866.50

Effective 15 Dec 08

Prices for custom sizes are available on request

5% discount for case lots:

9" to 36" long - 12 pieces

48" long - 4 pieces

All prices EXW Lawrenceburg, Tennessee, USA

Subject to change without notice

GRAF
Tech
International

Refractory Systems' Sales Office

791 Santa Fe Pike

Columbia, TN 38401 USA

Tel: 1-931-380-4284

Fax: 1-931-380-4475

LT1.090625

LT1 is a trademark of GrafTech International Holdings Inc.